


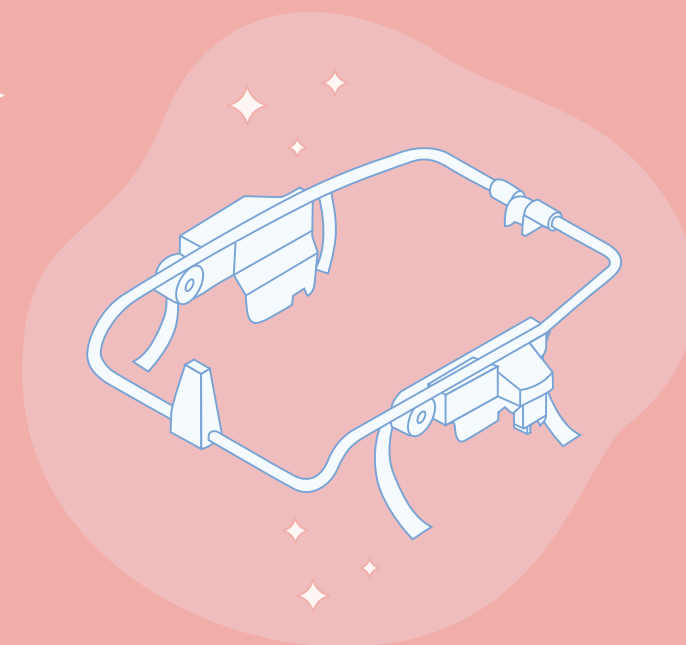

Mockingbird Car Seat Adapter

Go from car to stroller and back again without
missing a beat.

hellomockingbird.com

[@hello_mockingbird](https://twitter.com/hello_mockingbird)

Warning

Please follow all of these instructions to ensure the safety of you and your child. Keep these instructions for future reference. Failure to follow these instructions could result in serious injury or death.

Avoid serious injury from falling or sliding out. Always ensure that the child is properly positioned by using the safety harness according to these instructions.

This product is not from, sponsored or endorsed by Britax, Artsana S.p.A, Goodbaby International Holdings Ltd, Newell Brands Inc., or Graco Children's Products Inc.


Choking Hazard

Adult assembly required because of small parts. Keep (assembly parts) out of reach of children under 3 years.

Caution

- Make sure the stroller is fully erect and latched in the open and locked position before allowing children near the stroller.
- Make sure all body parts are clear of the stroller when folding and unfolding.
- Never use the stroller on stairways or escalators.
- Never use the stroller with roller skates or in-line skates.
- Never leave children unattended in this product.
- Never allow the stroller to be used as a toy.
- The maximum weight that can be carried in the lower basket is 25 lbs. Placing excessive weight in the unit or on the unit (e.g., purses, shopping bags, parcels, diaper bags, or accessory items) may change the balance of the stroller and cause hazardous/unstable conditions.
- Use of the stroller with children weighing more than 50 pounds will cause excessive wear and stress on the stroller and may cause hazardous/unstable conditions to exist.
- Not intended for overnight sleep.
- The car seat models compatible with this product may change.


First, unpack the box and make sure you've got everything

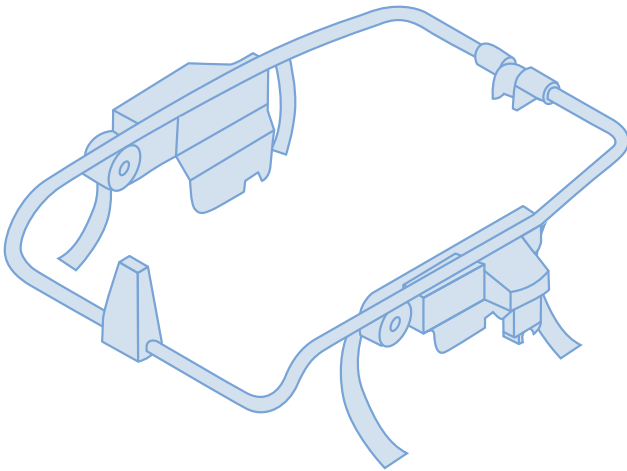

Mockingbird Car Seat Adapter

Let's get started setting up your Mockingbird Car Seat Adapter!


We know every member of our flock is unique, so the Mockingbird Car Seat Adapter is compatible with multiple car seat brands. To get started, find your car seat brand below, flip to that page and follow the easy steps to get strolling with your car seat.

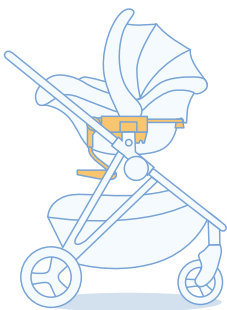


3 Britax




7 Chicco

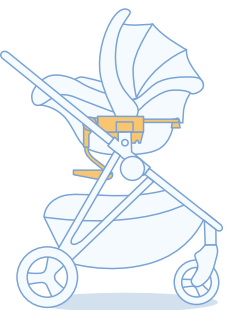

11 Evenflo

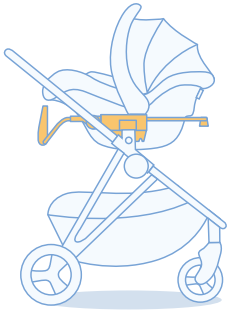

15 Graco

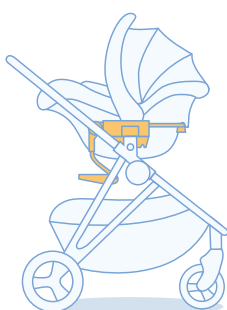


19 Baby Jogger

Britax Car Seats

1 Prepare your stroller


Engage the brake

Push downward on the brake to lock your stroller in-place.

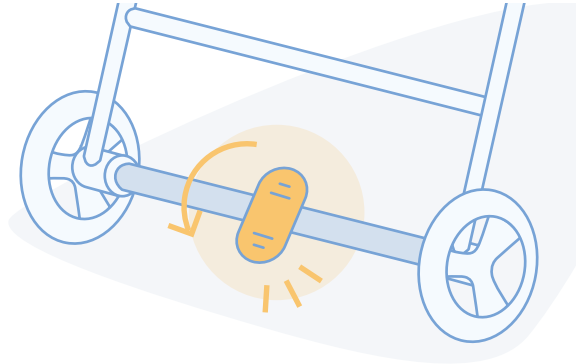

Remove your seat


If you have your stroller seat attached, push the white buttons on both sides of the seat and pull up to fully remove.

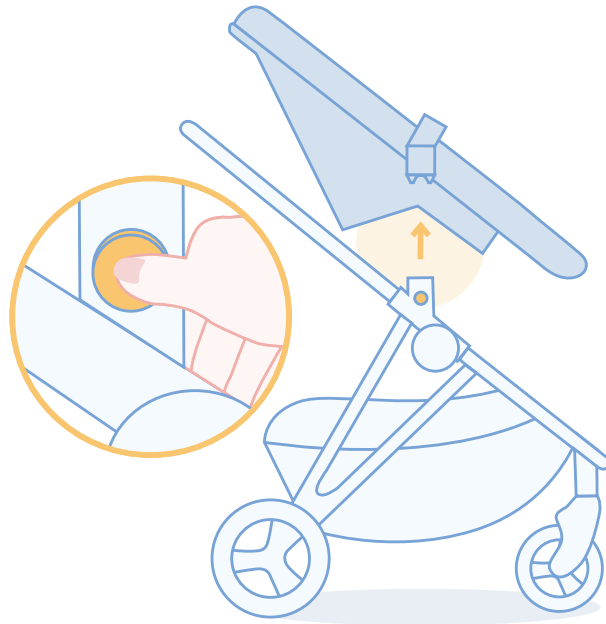

2 Attach the Car Seat Adapter


Line up the adapter

Hold the Car Seat Adapter so that the short end with the vertical plastic component is at the back of the stroller (the same end as the handlebar). Press both buttons located on the sides of the adapter and rotate the support bar downward.

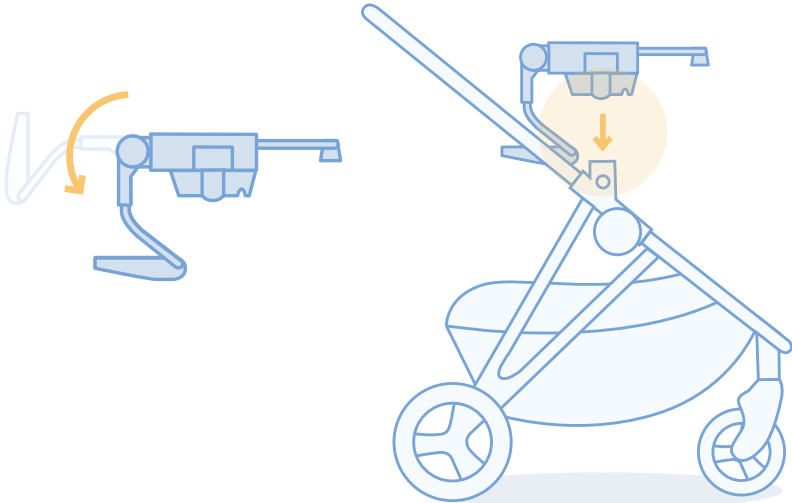

Attach the adapter


Place your Car Seat Adapter into the right and left joints. You will hear it “CLICK” into place.

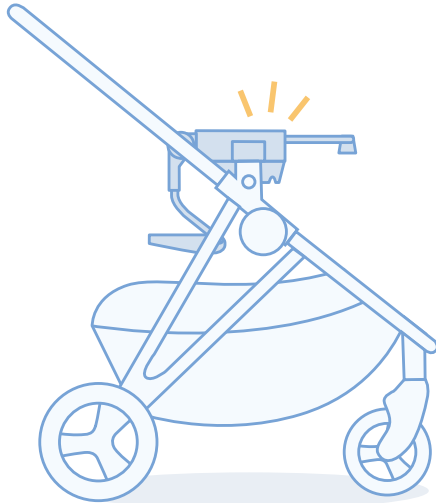

3 Attach the Infant Car Seat


Attach the car seat

Adjust the handlebar to your desired height by pressing the white buttons located on the left and right sides of the handlebar at the same time. While pressing, rotate the handlebar upward or downward. With your car seat facing the handlebar, place it onto the Car Seat Adapter until you hear it “CLICK” into place.

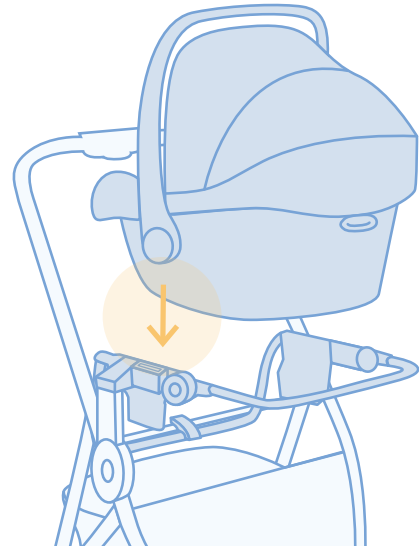

Secure the car seat

Attach the velcro straps to the hooks on the front of the car seat (near the handlebar) and you’re ready to stroll!

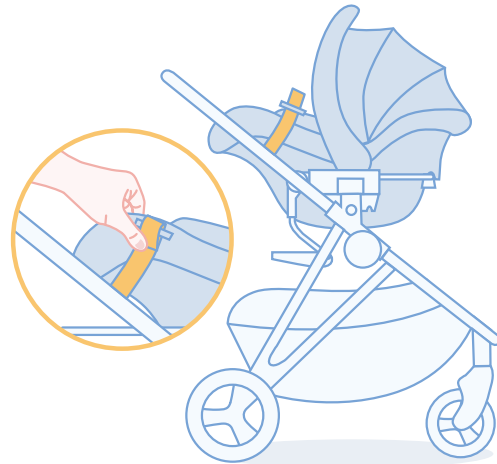

Pro Tip

If you’re folding your stroller, you can leave one (or two!) Car Seat Adapters attached. But don’t forget to remove the car seat itself!

4 Remove the Infant Car Seat and Adapter


Remove the car seat

Undo the velcro straps. Pull up on the latch at the back of the car seat and lift the seat off the adapter. The adapter should stay attached to your stroller frame.



Remove the Car Seat Adapter

Remove the adapter by clicking the white buttons on the car seat adapter and lifting it off of the frame.

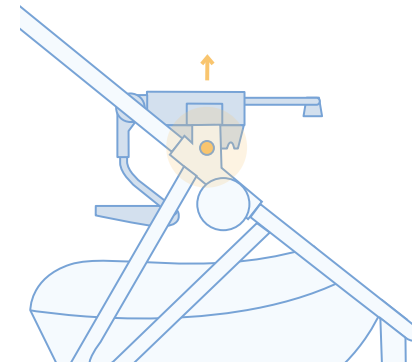

**Important!**


The adapter should stay attached to your stroller frame when you remove the car seat. If they come off together, reconnect the adapter to the frame and remove the car seat first.

Chicco Car Seats

1 Prepare your stroller


Engage the brake

Push downward on the brake to lock your stroller in-place.

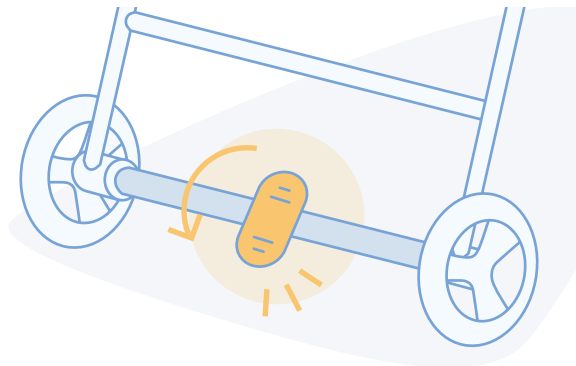

Remove your seat

If you have your stroller seat attached, push the white buttons on both sides of the seat and pull up to fully remove.

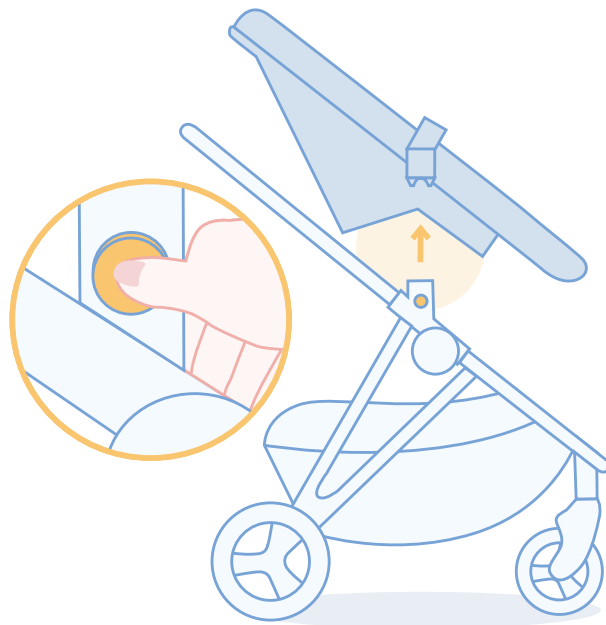

2 Attach the Car Seat Adapter

Line up the adapter

Hold the Car Seat Adapter so that the short end with the vertical plastic component is at the back of the stroller (the same end as the handlebar).



Attach the adapter


Place your Car Seat Adapter into the right and left joints. You will hear it “CLICK” into place.



3 Attach the Infant Car Seat


Attach the car seat

With your car seat facing the handlebar, place it onto the Car Seat Adapter until you hear it “CLICK” into place.

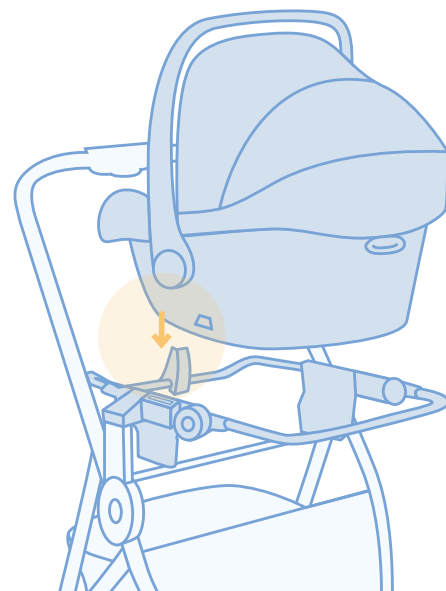

Add extra support

For extra support and stability, velcro straps are available and can be attached to the front of the car seat.

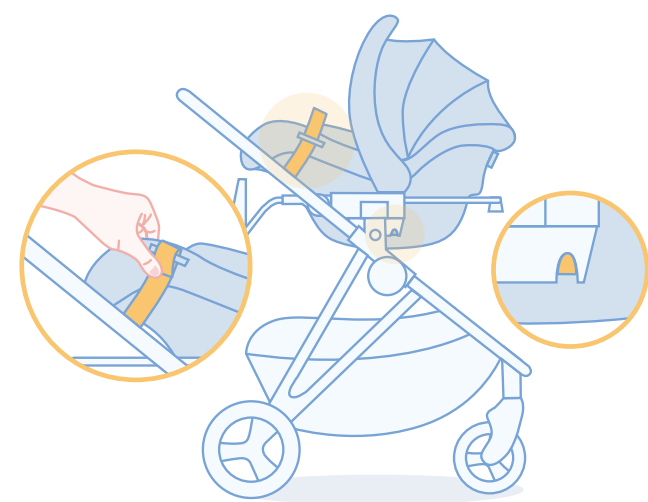

Pro Tip

If you’re folding your stroller, you can leave one (or two!) Car Seat Adapters attached. But don’t forget to remove the car seat itself!

4 Remove the Infant Car Seat and Adapter


Remove the car seat

Undo the velcro straps. Pull up on the latch at the back of the car seat and lift the seat off the adapter. The adapter should stay attached to your stroller frame.



Remove the Car Seat Adapter

Remove the adapter by clicking the white buttons on the car seat adapter and lifting it off of the frame.

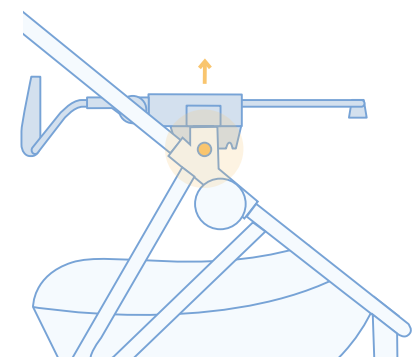


Important! The adapter should stay attached to your stroller frame when you remove the car seat. If they come off together, reconnect the adapter to the frame and remove the car seat first.

Evenflo Car Seats

1 Prepare your stroller


Engage the brake

Push downward on the brake to lock your stroller in-place.

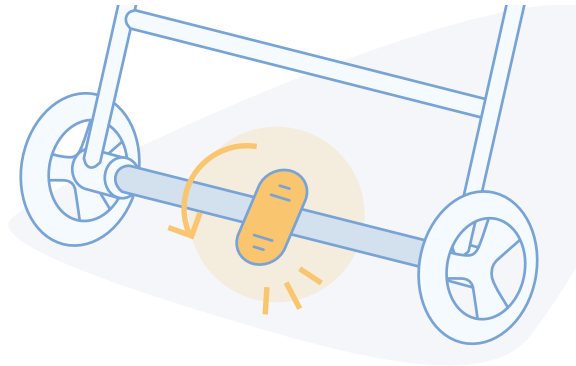

Remove your seat


If you have your stroller seat attached, push the white buttons on both sides of the seat and pull up to fully remove.

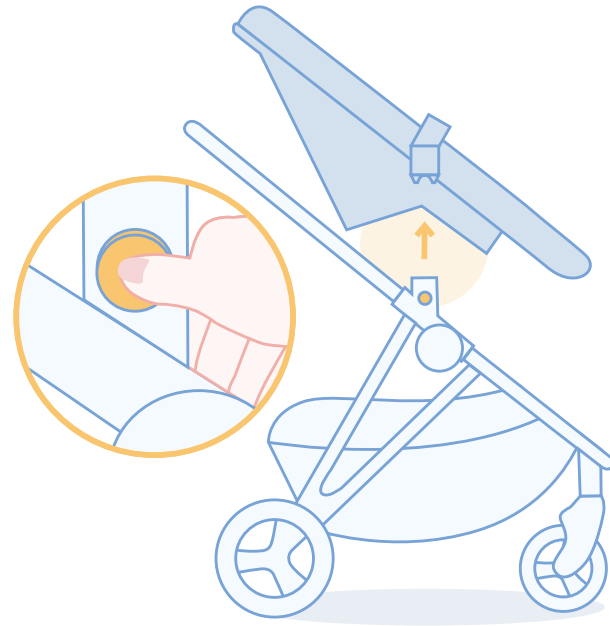

2 Attach the Car Seat Adapter

Line up the adapter

Hold the Car Seat Adapter so that the short end with the vertical plastic component is at the back of the stroller (the same end as the handlebar). Press both buttons located on the sides of the adapter and rotate the support bar downward.

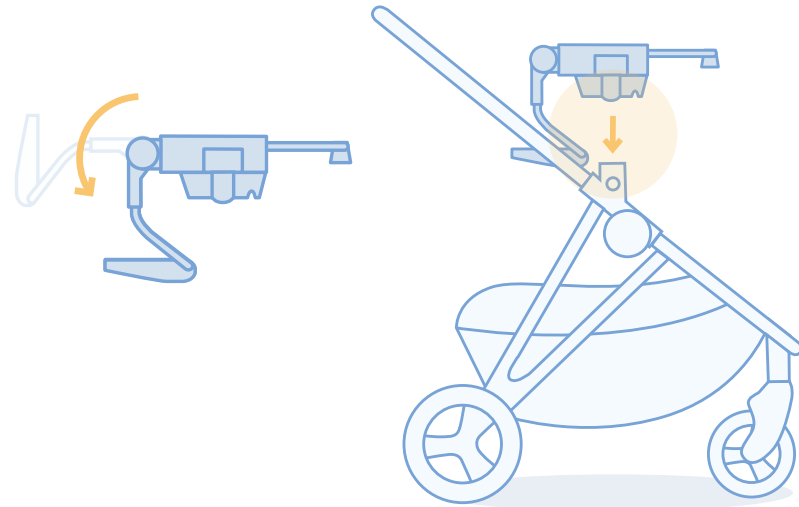

Attach the adapter


Place your Car Seat Adapter into the right and left joints. You will hear it “CLICK” into place.



3 Attach the Infant Car Seat


Attach the car seat

With your car seat facing the handlebar, place it onto the Car Seat Adapter until you hear it “CLICK” into place.

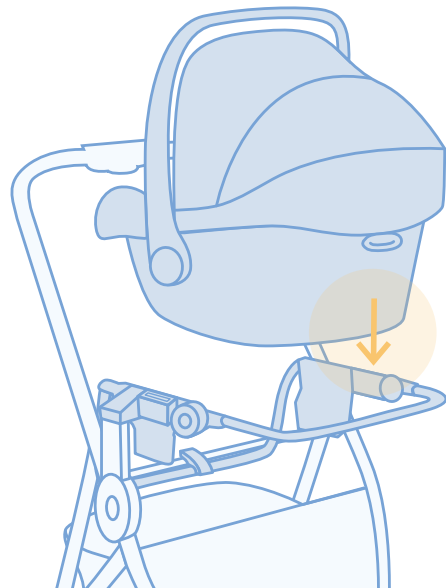

Secure the car seat

Attach the velcro straps to the hooks on the front of the car seat (near the handlebar) and you’re ready to stroll!

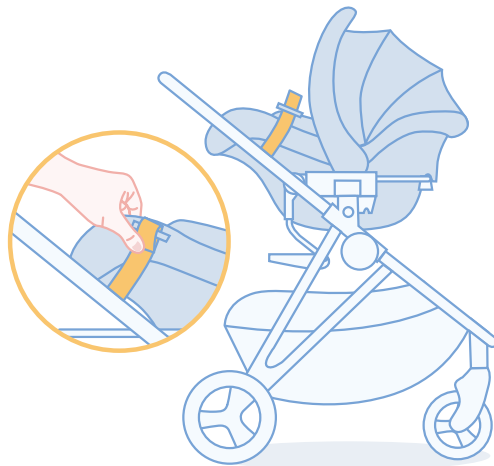

Pro Tip

If you’re folding your stroller, you can leave one (or two!) Car Seat Adapters attached. But don’t forget to remove the car seat itself!

4 Remove the Infant Car Seat and Adapter


Remove the car seat

Undo the velcro straps. Pull up on the latch at the back of the car seat and lift the seat off the adapter. The adapter should stay attached to your stroller frame.



Remove the Car Seat Adapter

Remove the adapter by clicking the white buttons on the car seat adapter and lifting it off of the frame.

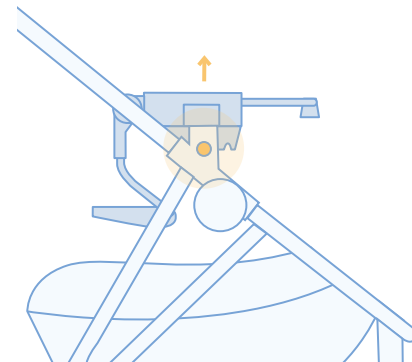

Important!


The adapter should stay attached to your stroller frame when you remove the car seat. If they come off together, reconnect the adapter to the frame and remove the car seat first.

Graco Car Seats

1 Prepare your stroller


Engage the brake

Push downward on the brake to lock your stroller in-place.

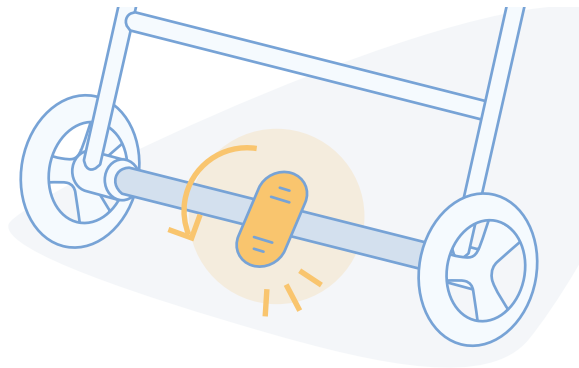

Remove your seat


If you have your stroller seat attached, push the white buttons on both sides of the seat and pull up to fully remove.

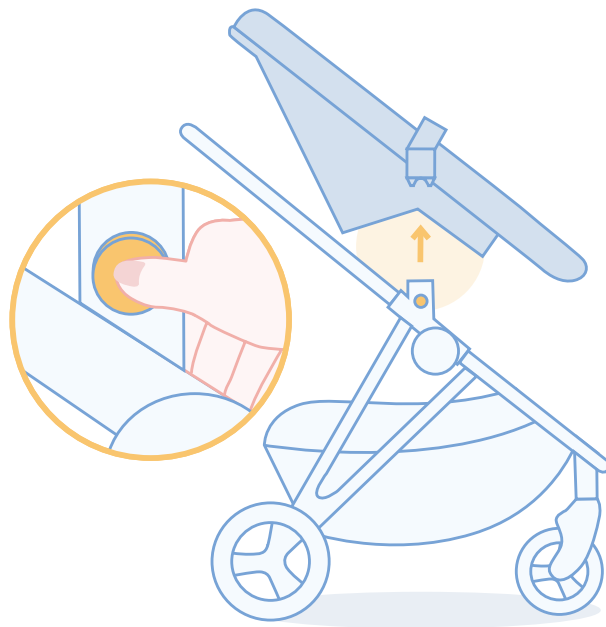

2 Attach the Car Seat Adapter

Line up the adapter

Hold the Car Seat Adapter so that the short end with the vertical plastic component is at the back of the stroller (the same end as the handlebar).

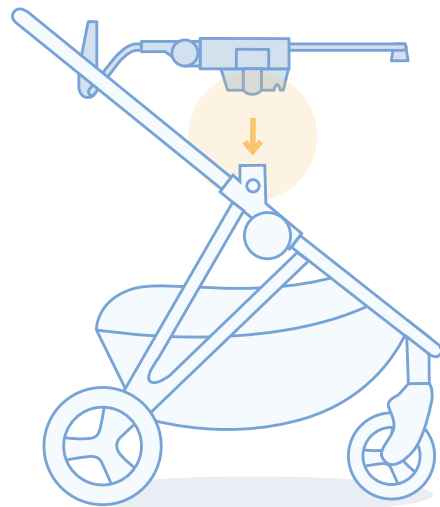

Attach the adapter


Place your Car Seat Adapter into the right and left joints. You will hear it “CLICK” into place.



3 Attach the Infant Car Seat


Attach the car seat

With your car seat facing the handlebar, place it onto the Car Seat Adapter until you hear it “CLICK” into place.

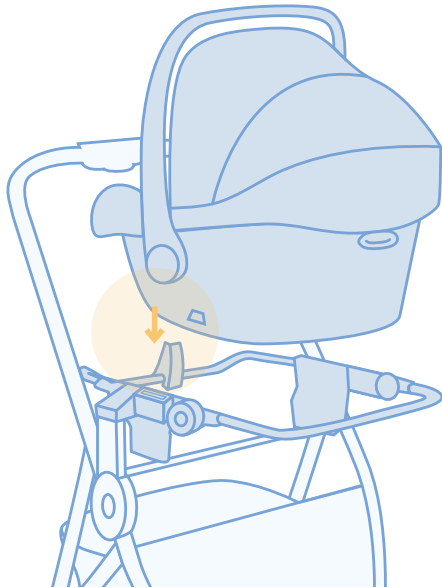

Add extra support

For extra support and stability, velcro straps are available and can be attached to the front of the car seat.

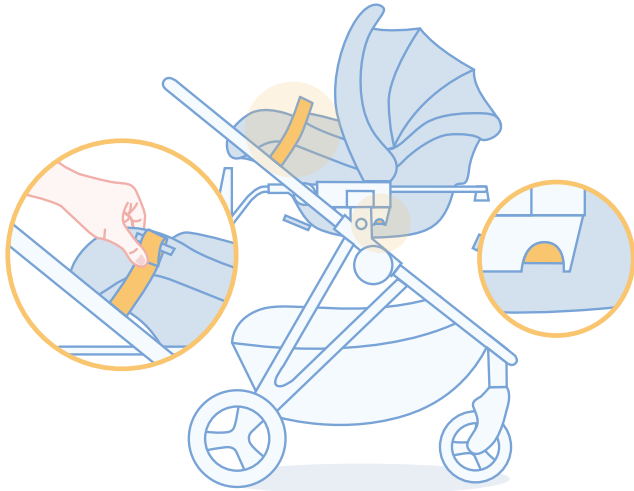

Pro Tip

If you're folding your stroller, you can leave one (or two!) Car Seat Adapters attached. But don't forget to remove the car seat itself!

4 Remove the Infant Car Seat and Adapter


Remove the car seat

Undo the velcro straps. Pull up on the latch at the back of the car seat and lift the seat off the adapter. The adapter should stay attached to your stroller frame.



Remove the Car Seat Adapter

Remove the adapter by clicking the white buttons on the car seat adapter and lifting it off of the frame.

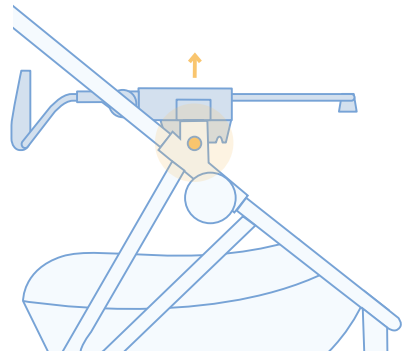

Important!


The adapter should stay attached to your stroller frame when you remove the car seat. If they come off together, reconnect the adapter to the frame and remove the car seat first.

Baby Jogger Car Seats

1 Prepare your stroller


Engage the brake

Push downward on the brake to lock your stroller in-place.

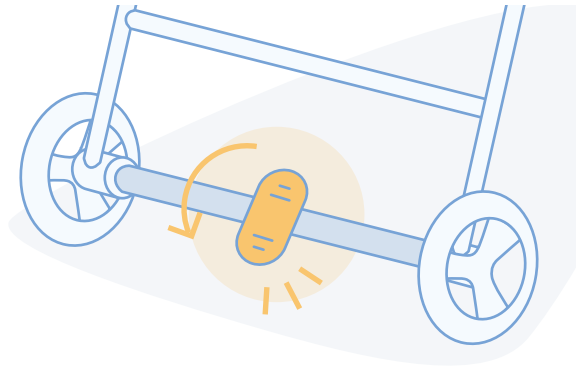

Remove your seat


If you have your stroller seat attached, push the white buttons on both sides of the seat and pull up to fully remove.

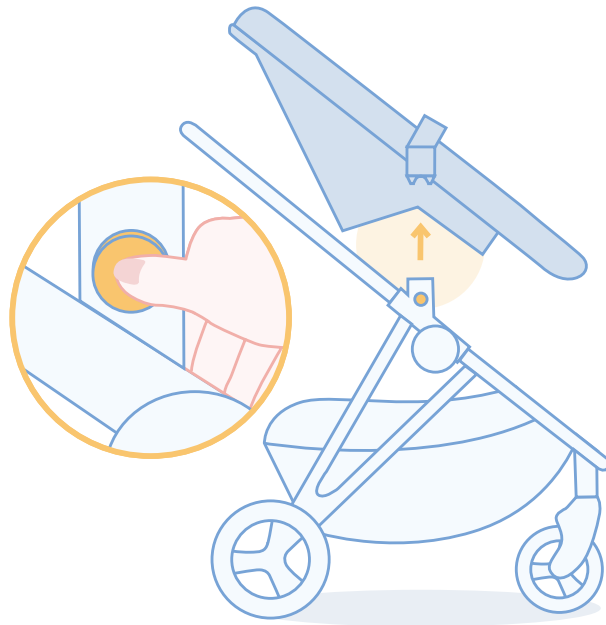

2 Attach the Car Seat Adapter


Line up the adapter

Hold the Car Seat Adapter so that the short end with the vertical plastic component is at the back of the stroller (the same end as the handlebar). Press both buttons located on the sides of the adapter and rotate the support bar downward.

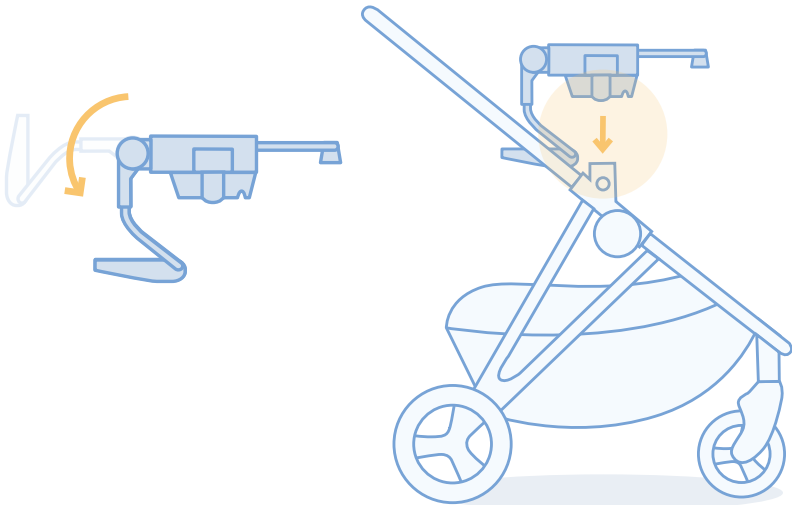

Attach the adapter


Place your Car Seat Adapter into the right and left joints. You will hear it “CLICK” into place.

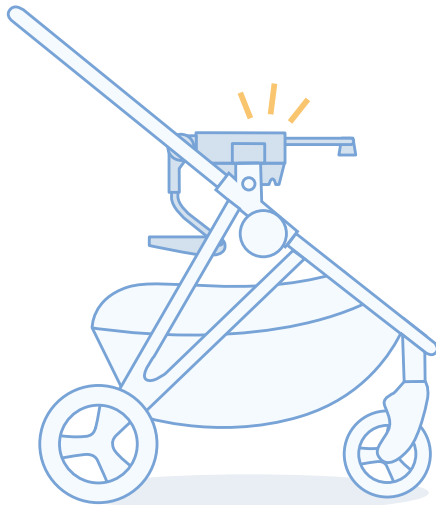

3 Attach the Infant Car Seat


Attach the car seat

With your car seat facing the handlebar, place it onto the Car Seat Adapter until you hear it “CLICK” into place.

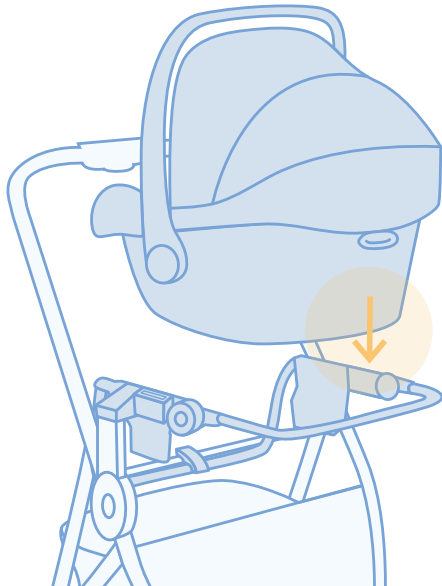

Add extra support

For extra support and stability, velcro straps are available and can be attached to the front of the car seat.

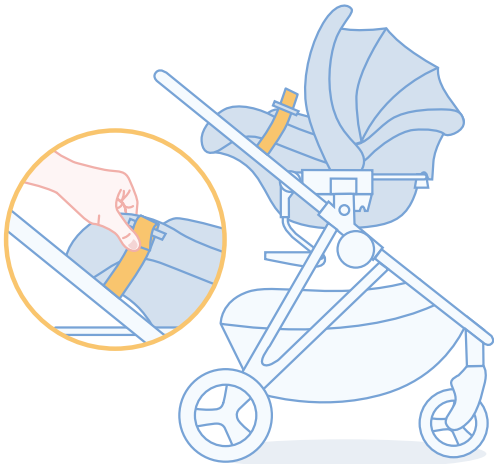

Pro Tip

If you’re folding your stroller, you can leave one (or two!) Car Seat Adapters attached. But don’t forget to remove the car seat itself!

4 Remove the Infant Car Seat and Adapter


Remove the car seat

Undo the velcro straps. Pull up on the latch at the back of the car seat and lift the seat off the adapter. The adapter should stay attached to your stroller frame.



Remove the Car Seat Adapter

Remove the adapter by clicking the white buttons on the car seat adapter and lifting it off of the frame.

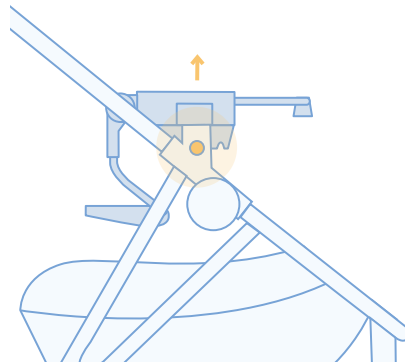

Important!

The adapter should stay attached to your stroller frame when you remove the car seat. If they come off together, reconnect the adapter to the frame and remove the car seat first.

When things get messy

Cleaning the Car Seat Adaptor



Hand wash with damp cloth and mild detergent if needed